



CST 212

PALLETWRAPPER

CYKLOP[®]
GLOBAL PACKAGING SOLUTIONS

STRAPPING
WRAPPING
CODING
TAPING

The pallet wrapper CST 212 is equipped with a simple pre-stretch system with an electromagnetic brake (maximum stretch percentage 250%). It is possible to manually control the tension on the film during the wrapping process. The machine is easy to operate, thanks to the clear and simple button functions. Replacing the film roll is simple and can be done quickly. In addition, there are recesses in the bottom plate, so that the machine can be moved internally with a forklift.

Advantages


- Infinitely adjustable turntable speed & film carriage speed
- Motor-driven pre-stretch 150% – 200% – 250%
- Adjustable number of bottom and top wraps
- Wrapping speed 12 rpm
- Possibility to save 6 wrapping programs

Options

- Inox version
- Anti corrosion treatment
- Integrated weighing unit
- Ramp
- Bigger turntable
- Extended mast up to 3300 mm
- Cutting unit
- Pressure plate
- Storing 99 programs
- Roping (securing load to the pallet)



> [Click here for a video of the CST 212](#) <

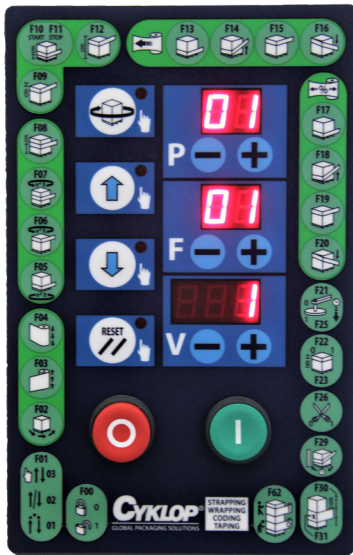

Technical data:	
Turntable	Ø1650 mm
Wrapping speed	12 rpm
Wrapping height	2200 mm
Pre-stretch	150% - 200% - 250%
Max. pallet dimensions	1000 x 1200 mm
Max. pallet height	2200 mm
Max. pallet weight	2000 kg
Total power	1,00 Kw
Power supply	230V 1 phase 50/60 Hz - 6A
IP Rating	IP 54

Cyklop International
 Industriestraße 133, D-50996 Köln
 (Rodenkirchen)
 Postfach / P.O. Box 50 12 20,
 D-50972 Köln (Rodenkirchen)

+49 (0) 2236 6020
www.cyklop.com
info@cyklop.com

